

ELETTROPOMPE SACEMI AD IMMERSIONE SERIE SP

SACEMI IMMERSION PUMPS SP SERIES



CARATTERISTICHE

IMPIEGHI

Sono adatte al trasferimento di liquidi contenenti impurità

Vengono comunemente impiegate su:

- Macchine utensili (fresatrici, torni)
- Macchine per la lavorazione del vetro (versione TRI)
- Impianti di trattamento superfici
- Impianti di filtrazione

Motore

2 poli - 2800 giri - trifase

Classe F IP55

CHARACTERISTICS

Uses

Suitable for transferring liquids containing impurities





Commonly used on:

- Machine tools (milling machines, lathes)
- Glass-working machines (TRI version)
- Surface treatment systems
- Filtering systems



Motor

2 poles - 2800 rpm - three-phase

Class F IP55

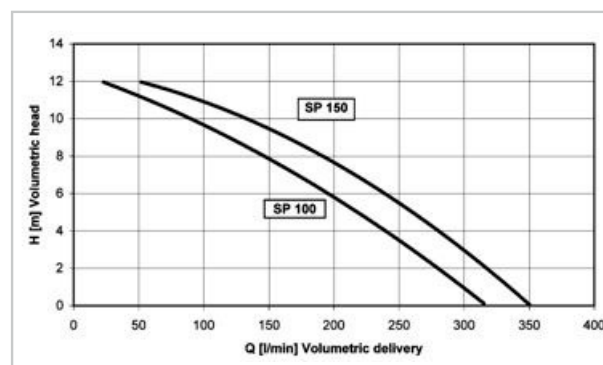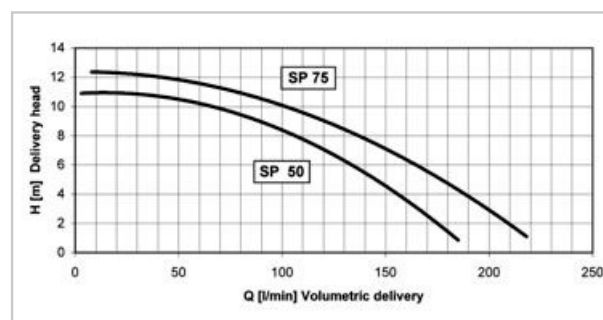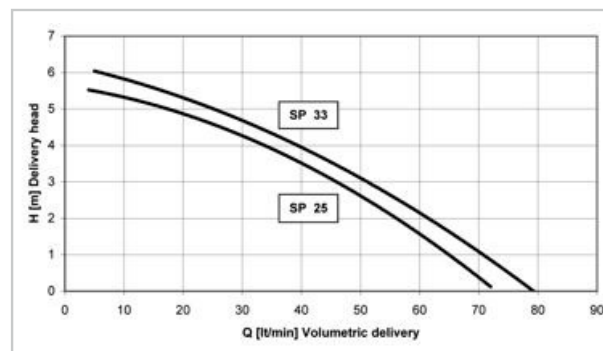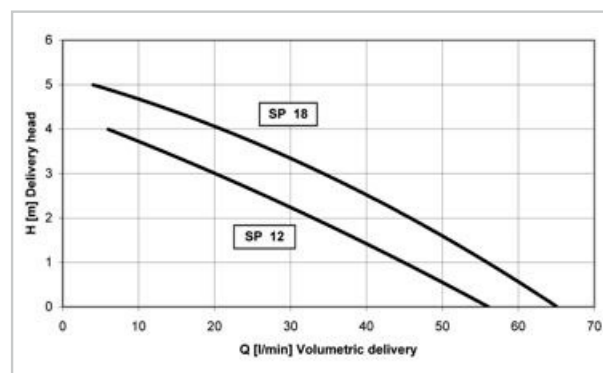

I dati riportati in questo diagramma sono riferiti ad una viscosità non superiore a 5 CST a 20°C.
The details shown on this diagram refer to a viscosity of not more than 5 CST at 20°C.

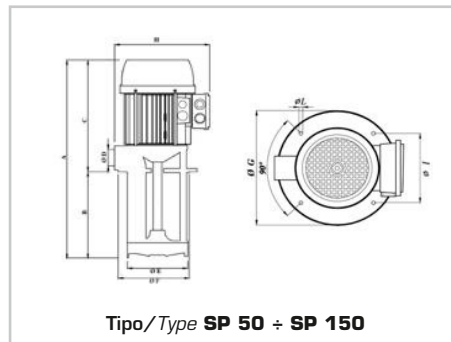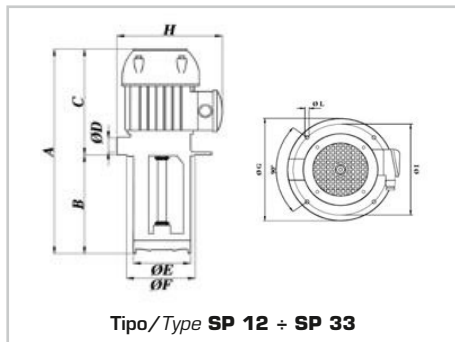

| Articolo Art. | Tipo Type | Kw | A mm. | B mm. | C mm. | Ø D Gas | Ø E mm. | Ø F mm. | Ø G mm. | Ø H mm. | Ø I mm. | Ø L mm. | Temp. Liquido Max Max Liquid Temp. |
|------------------|--------------|------|-------|-------|-------|---------|---------|---------|---------|---------|---------|---------|---------------------------------------|
| MU.221 | | | 255 | 90 | | | | | | | | | |
| MU.222 | | | 285 | 120 | | | | | | | | | |
| MU.223 | SP 12 | 0.15 | 335 | 170 | 165 | 3/4" | 98 | 100 | 130 | 151 | 115 | 7 | 70°C |
| MU.224 | | | 385 | 220 | | | | | | | | | |
| MU.225 | | | 435 | 270 | | | | | | | | | |
| MU.226 | | | 515 | 350 | | | | | | | | | |
| MU.227 | | | 255 | 90 | | | | | | | | | |
| MU.228 | | | 285 | 120 | | | | | | | | | |
| MU.229 | SP 18 | 0.16 | 335 | 170 | 165 | 3/4" | 98 | 100 | 130 | 151 | 115 | 7 | 70°C |
| MU.230 | | | 385 | 220 | | | | | | | | | |
| MU.231 | | | 435 | 270 | | | | | | | | | |
| MU.232 | | | 515 | 350 | | | | | | | | | |
| MU.233 | | | 305 | 90 | | | | | | | | | |
| MU.234 | | | 335 | 120 | | | | | | | | | |
| MU.235 | SP 25 | 0.30 | 385 | 170 | 215 | 3/4" | 98 | 100 | 130 | 170 | 115 | 7 | 70°C |
| MU.236 | | | 435 | 220 | | | | | | | | | |
| MU.237 | | | 485 | 270 | | | | | | | | | |
| MU.238 | | | 565 | 350 | | | | | | | | | |
| MU.239 | | | 305 | 90 | | | | | | | | | |
| MU.240 | | | 335 | 120 | | | | | | | | | |
| MU.241 | SP 33 | 0.40 | 385 | 170 | 215 | 3/4" | 98 | 100 | 130 | 170 | 115 | 7 | 70°C |
| MU.242 | | | 435 | 220 | | | | | | | | | |
| MU.243 | | | 485 | 270 | | | | | | | | | |
| MU.244 | | | 565 | 350 | | | | | | | | | |
| MU.201 | | | 450 | 200 | | | | | | | | | |
| MU.202 | | | 520 | 270 | | | | | | | | | |
| MU.203 | SP 50 | 0.53 | 600 | 350 | 250 | 1-1/4" | 138 | 140 | 180 | 215 | 160 | 9 | 70°C |
| MU.204 | | | 690 | 440 | | | | | | | | | |
| MU.205 | | | 800 | 550 | | | | | | | | | |
| MU.206 | | | 450 | 200 | | | | | | | | | |
| MU.207 | | | 520 | 270 | | | | | | | | | |
| MU.208 | SP 75 | 0.78 | 600 | 350 | 250 | 1-1/4" | 138 | 140 | 180 | 215 | 160 | 9 | 70°C |
| MU.209 | | | 690 | 440 | | | | | | | | | |
| MU.210 | | | 800 | 550 | | | | | | | | | |
| MU.211 | | | 500 | 200 | | | | | | | | | |
| MU.212 | | | 570 | 270 | | | | | | | | | |
| MU.213 | SP 100 | 1.15 | 650 | 350 | 300 | 1-1/4" | 138 | 140 | 180 | 230 | 160 | 9 | 70°C |
| MU.214 | | | 740 | 440 | | | | | | | | | |
| MU.215 | | | 850 | 550 | | | | | | | | | |
| MU.216 | | | 500 | 200 | | | | | | | | | |
| MU.217 | | | 570 | 270 | | | | | | | | | |
| MU.218 | SP 150 | 1.47 | 650 | 350 | 300 | 1-1/4" | 138 | 140 | 180 | 230 | 160 | 9 | 70°C |
| MU.219 | | | 740 | 440 | | | | | | | | | |
| MU.220 | | | 850 | 550 | | | | | | | | | |

N.B. Per il corretto utilizzo delle pompe si consiglia la visione della **tabella impieghi** illustrata a pagina 106.
NOTE: For correct pump use, see **uses table** on page 106.