

POMPE AUTOADESCANTI

SELF-PRIMING PUMPS

SPECIAL 020 / 025 / 030 / 040 / 050

SPECIAL FM 030 FM / 040 FM / 050 FM



Pompe autoadescenti bisenso ad anello liquido laterale largamente utilizzate nel settore nautico per svuotamento di sentine, antincendio, lavaggio catene e travaso di liquidi come: acqua dolce, acqua di mare, gasolio ecc. Disponibili nelle versioni con puleggia o ad asse nudo (SPECIAL), o con frizione magnetica (SPECIAL FM).

Temperatura massima 70° C.

Corpo pompa: Bronzo.

Girante: Bronzo.

Raccordi: Bronzo.

Albero: Acciaio Inox AISI 316.

NON UTILIZZARE PER TRAVASARE BENZINA.

Bidirectional self-priming pumps with side liquid ring, widely used in the nautical sector to empty bilges, for anti-fire equipment, washing of chains and transfer of liquids such as: fresh water, sea water, gas-oil etc.

Available with pulley or bare shaft (SPECIAL), or with clutch (SPECIAL FM).

Max temperature 70° C.


Pump body: Bronze.

Impeller: Bronze.

Pipe fittings: Bronze.

Shaft: AISI 316 Stainless Steel.

DO NOT USE TO TRAFER PETROL.

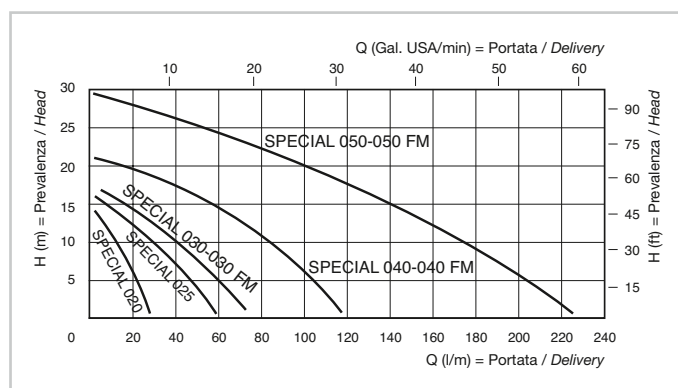

Articolo Art.	Potenza/Power		Giri/min. RPM	Aspirazione max. (m) Max. inlet (m)	Portata max. (l/min) Max. delivery (l/min)	Prevalenza max. (m) Max. head (m)
	(HP)	(KW)				
SPECIAL.020	0.35	0.26	2800	6	30	15
SPECIAL.025	0.6	0.45	2800	6	60	18
SPECIAL.030 - 030FM12* - 030FM.24*	1	0.75	1400	6	75	18
SPECIAL.040 - 040FM12* - 040FM.24*	1.5	1.12	1400	6	120	22
SPECIAL.050 - 050FM12* - 050FM.24*	2.5	1.86	1400	6	230	30

* FM= Frizione magnetica a scelta 12 V o 24 V / Magnetic clutch 12 V or 24 V